

EX 121 – SD 250

TECHNICAL SPECIFICATIONS

Excavator size	> 7 ton
Drill mast	Speedy Drill 250 Gear Box
Stroke	Standard 2300 (option 3300 max)
Pull back / down	1.500 Kg
Base frame and Kinematic	Include plate to attach to your excavator with: <ul style="list-style-type: none"> • Single WDL 343 for mast rotation (180°+180°) • Back feed 550 mm • Side chain system guide for cable and hoses for stroke longer than 1,8 m
Hydraulics	5 proportional valves (rotation/ percussion/ feed/ slew/ back feed)
Controls	Radio remote control
Data log	On request

MAIN FRAME ACCESSORIES AND OPTIONS

Extra slew WDL 343 unit with 90° structure for extra mast inclination

DRILL MAST ACCESSORIES AND OPTIONS


Clamp and break device	<ul style="list-style-type: none"> • 50-156; 54-180K • Hydraulic centralizer 25, 32 or 38 mm • Manual centralizer for 2", 3" or 4"
Slidramatic	Rotary head lateral movement
Winch	800 kg winch with pulley
Water pump	25 lt at 40 bars
Lubricator	1 lt – 8 lt
Dust collector	On request (depend on size)
Compressor	On request (depend on size)
Shank lubrication system	On request

SAFETY GARD OPTIONS

Manual	Manual opening type
Electronic	Electronic front guard and lateral steel guard
Hydraulic	Corner opening hydraulic type

Rotary heads	RP100 - RP200 - RP280 - RP500
Drifters	<ul style="list-style-type: none"> • Eurodrill RH1X – RH2X – RH3X • Floating spindle kit for DTH available • Doofor 430X - 530X - 538L

SINGLE SLEW VERSION

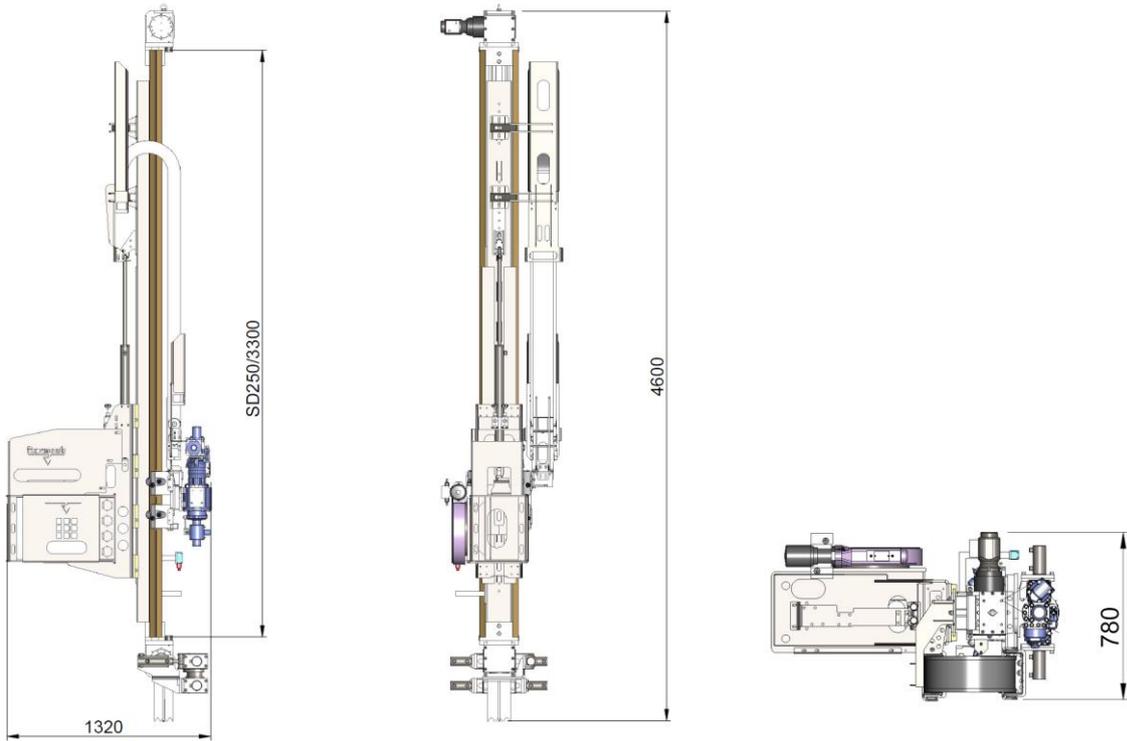

DOUBLE SLEW VERSION

