

EX 321 – S300

TECHNICAL SPECIFICATIONS

Excavator size	> 15 ton
Drill mast	S300 Gear Box
Stroke	Standard 3300 (option 4300 max)
Pull back / down	4.500 Kg
Base frame and Kinematic	Include plate to attach to your excavator with: <ul style="list-style-type: none"> • Single slew WDL 419 for mast rotation (180°+180°) • Back feed 800mm • Side chain guide for hoses
Hydraulics	5 proportional valves (rotation/ percussion/ feed/ slew / back feed)
Controls	Radio remote control and LCD screen for diagnostic and setting
Centralizer	Manual centralizer included
Data log	On request

MAIN FRAME ACCESSORIES AND OPTIONS

90° cylinder mounted before slew for extra mast inclination
Extra slew WDL 419 DM unit with 90° structure for extra mast inclination
Spider excavator foot main frame
180° actuator for side mast rotation

DRILL MAST ACCESSORIES AND OPTIONS

Clamp and break device	25-90; 50-156; 54-180K; 50-190; 50-250
Slidramatic	Rotary head lateral movement
Winch	800 kg winch with pulley
Water pump	25lt at 40 bars
Lubricator	1lt - 6lt - 9lt




SAFETY GARD OPTIONS

Manual	Manual opening type
Electronic	Electronic front guard and lateral steel guard
Hydraulic	Corner opening hydraulic type

ROTARY HEADS AND DRIFTERS

Rotary heads	RP500 - RP 800
Drifters	<ul style="list-style-type: none"> • EURODRILL RH4 X - RH5X - RH6 X - RH10 X • Floating spindle kit for DTH available

SLEW + 90° CYLINDER VERSION

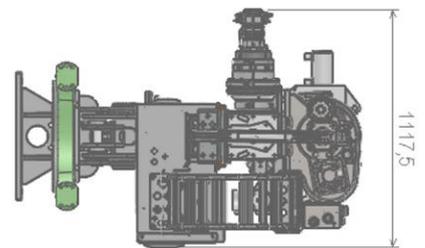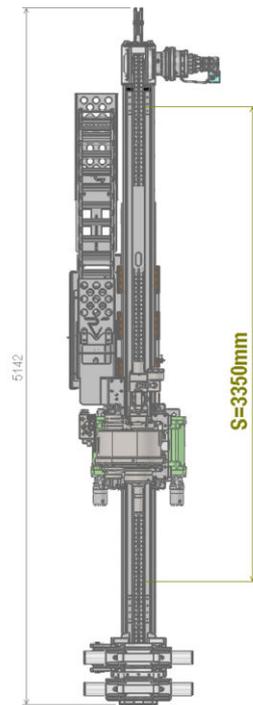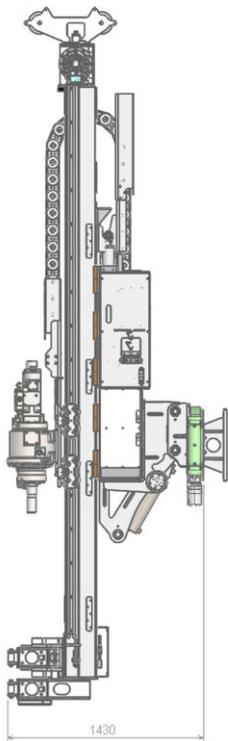

DOUBLE SLEW VERSION

