

LUX HYBRID



MULTIPLE FLOODLIGHTS / 6 X 100 W
ILLUMINATED AREA / 4500 m²



LITHIUM BATTERY
25,9V



HYDRAULIC TELESCOPIC MAST
MAX HEIGHT / 8,5 m
LIFETIME WARRANTY



COMAP LOGIC PANEL
BATTERY CHARGER
LIGHT SENSOR + TIMER



ADJUSTABLE FLOODLIGHTS
340° / MAST ROTATION



YANMAR 2TNV70 / 2 CYL
STAGE 5 / 1500 RPM
LIQUID COOLED ENGINE



GALVANIZED METAL BODY
80 µm POWDER COATING



RATED OUTPUT / 3.5 kVA - 230V



HYDRAULIC RANGE LUX HYBRID

MADE IN
ITALY

TECHNICAL DATA

Dimensions & Weight

Dimensions min.	mm	2520 X 1380 X 2500
Dimensions max.	mm	2520 X 2330 X 8500
Total weight without fuel	Kg	1065

Features

Rotation		340°
Floodlight	W	6 X 100 W
Lamps		LED
Wind stability	Km/h	110

Battery Pack

Type		Lythium
Battery pack	V	25,9
Expected battery cycles	N	5000
Running Time	h	11.5
Charging time (Led Off)	h	3


Alternator

Model		Synchronous Linz or equivalent
Frequency	Hz	50
Rated output	kVA/V	3.5 - 230

Engine

Model		Yanmar 2TNV70 / 2 cyl. / liquid cooled
Fuel		Diesel
r.p.m.		1500
Noise Level	db at 7 meters	65
Tank capacity	l	61
Running time before refueling	h	536
Fuel consumption	l/h	0.55



Illuminated Area

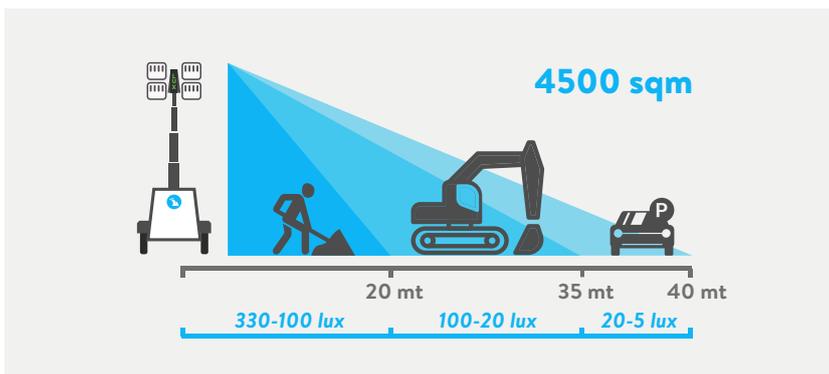


**EU HOMOLOGATED
TOW TRAILER
AMOS KIT**
Most automatic lowering system



**STANDARD
LIGHT SENSOR + TIMER**

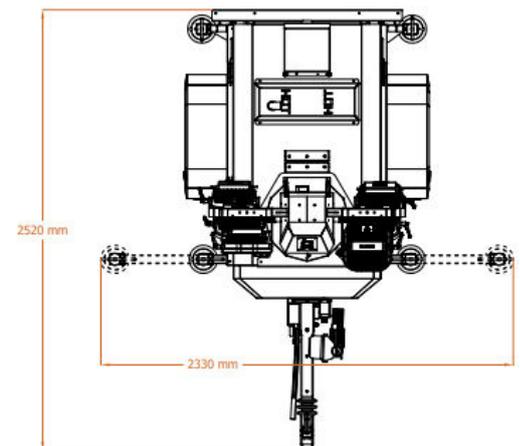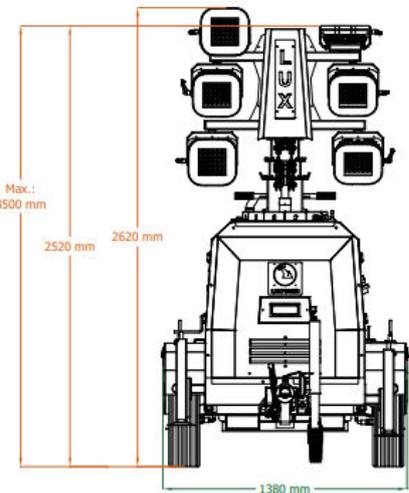

Loading Plan



Full Truck 9 Units
Minimal Assembly 10 Units

Luxtower: Via Strada Nuova, 28 - 27050 Codevilla (PV) ITALY | TLF. +39 0383 365544 | Fax +39 0383 49702

LUXTOWER ongoing policy is in continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only. LUXTOWER® - 2016© All rights reserved.